



INSTALLATION UNDER A COUNTERTOP

The sinks installed under the countertop are distinguished by excellent technical integration: the countertop area remains larger, surrounding spaces and surfaces are easier to clean and they go well with natural or artificial stone, ceramic or glass surface.


Congratulations on buying our product! Before using the sink, please carefully read and follow these instructions.

These instructions are intended for stainless steel AQUASANITA and SILICSANA sinks installed under a countertop.




ATTENTION: if you have purchased a sink which is installed over a countertop, please read the instructions for that type of sink.


Three main methods for the installation of THE SINK UNDER A COUNTERTOP:

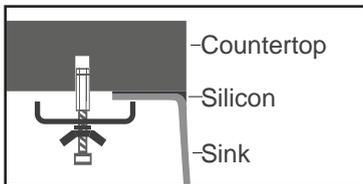

ZERO, when the sink is aligned with the countertop;

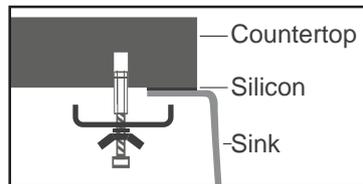

POSITIVE, when the sink is protruding above the

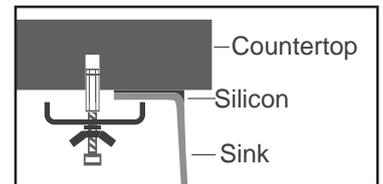

NEGATIVE, when the sink is installed in the niche of the countertop.

The method is selected individually after making sure that the sink is convenient to use and there is enough space for accessories (strainers, cutting boards, etc.) after the installation.



NOTE: before installing the sink, check whether it is not damaged and make sure that the countertop is sturdy enough, not absorptive and at least 3 cm thick. Learn about the properties of the countertop material (granite, stone, marble), which may affect the specifics of installation.




REMEMBER that the template is presented as guidance only. In order to avoid errors, measure the length and width of the sink, turn it upside down and write down the dimensions with a marker. This will ensure more precise cutting.




WE RECOMMEND entrusting the installation of the sink to professionals who have specialized knowledge and skills.

INSTALLATION Follow the steps below to install the sink properly.




01

Select the installation place for the sink. Make sure that the surface is completely level and there is enough space under the countertop to fasten the brackets. Place the template on the countertop at the selected place, fix it with scotch tape and check whether it is in correct position. Outline the template with a marker.



02


Use a cutting device (router) to cut an opening in the countertop following the outline.



03


Drill the holes at the bracket fastening places.

NOTE: prior to placing the sink in the opening, install the tap.



04

Clean the edges of the sink. Check whether they are even and not greasy. Cover the edges evenly with silicone.



05

Place the sink in the opening on the countertop and press it. Make sure it is in correct position and fasten the brackets.

YOUR NEW SINK IS READY FOR USE!

GUARANTEE 5 YEARS. Manufacturer is liable for manufacturing and material defects of an item during a guarantee period. In case of detecting such defects, return your sink to the seller. Keep purchasing documents during the whole guarantee period and attach it to the sink returned.

GUARANTEE IS NOT VALID for parts and additives, enclosed in a sink kit also for defects, appeared because of wrong installation and maintenance of a sink. Mechanical damage during operation.

